


foggia

Commercial

COMMERCIAL FREESTANDING TUMBLE DRYER

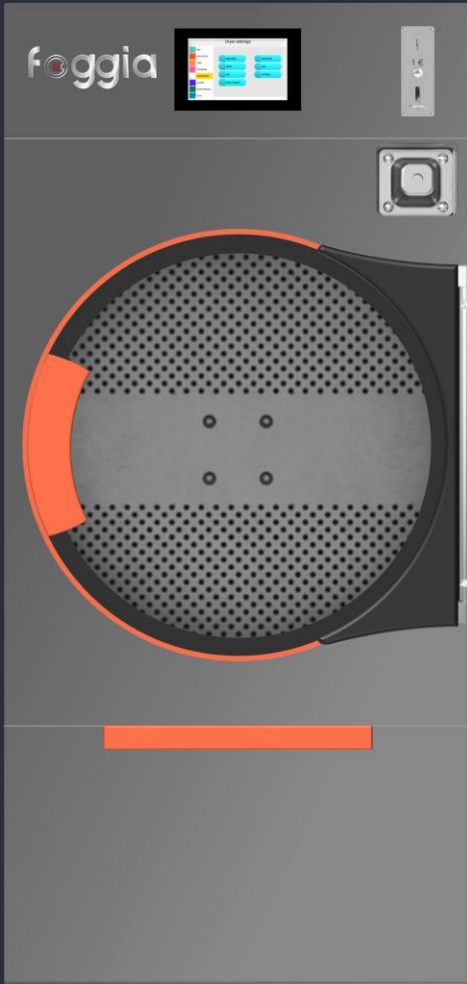

Fast dry (20-30 minutes), increase productivity & energy cost.



Reversing cylinder, improve large items drying time



LP Gas/ Electric heat



Industrial quality parts
Emerson gas valve, SKF bearing



SPECIFICATION

	FTG160	FTG220	FTG270	FTG330
Cylinder volume - l	286	380	477	560
Capacity - kg				
1 : 19 ratio	15	20	25	29
1 : 20 ratio	14	19	24	28
Cylinder Diameter - mm	745	855	855	900
Cylinder Depth - mm	655	660	830	880
Voltage	220/50/1	220/50/1	220/50/1	220/50/1
Motor power (kw)	0.25	0.55	0.55	0.55
Fan (kw)	0.37	0.37	0.37	0.37
Heating Option				
Gas heat - LPG/NLG (BTU)	75000	95000	115000	135000
Electric heat (kw)	10.5	14.4	19.8	25.2
Pipe connection				
Gas inlet - inch	0.5	0.5	0.5	0.5
Exhaust - mm	200	200	200	200
Air flow (cfm)	471	589	589	647
Unit dimension - L x W x H mm	800 x 1121 x 1675	910 x 1124 x 1784	910 x 1294 x 1784	943 x 1336 x 1799
Packing dimension - L x W x H mm	920 x 1241 x 1825	1030 x 1244 x 1934	1030 x 1414 x 1934	1063 x 1456 x 1949
Net weight - kg	190	223	251	273
Gross weight - kg	230	263	291	313