


REVOLUTIONARY **HYGIENIC** COMMERCIAL SOFTMOUNT WASHER



99.99%* Bacteria Elimination

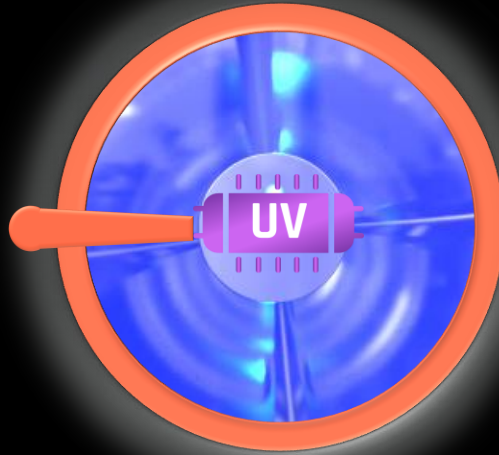

**Staphylococcus
aureus**




**Aspergillus
niger**



**Shigella
flexneri**



**Escherichia
coli**

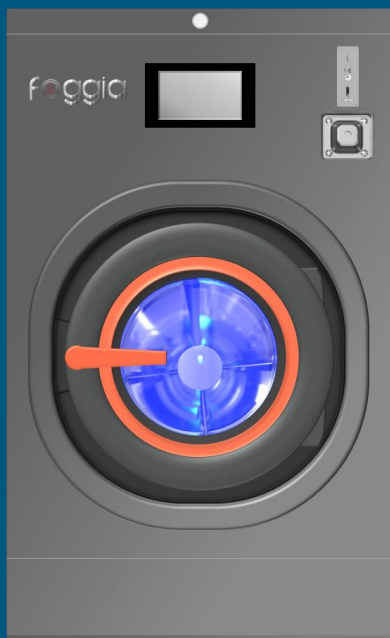

363g washer extract force

Remove most moisture remain, help dry faster & save energy cost

Easy to install & save cost

Softmount type washer

Customable program

Flexible cycle & segment personalize program

Built in 5 channel signal board

Convenient to add cleaning agent for professional wash application

❖ China detection center of microbiology (Test report no: 2021FM05060R01)

foggia

SPECIFICATION

	FYW170	FYW220	FYW270	FYW350	FYW450
Cylinder volume - l	147	194	237	341	423
Capacity - kg					
1 : 9 ratio	17	22	26.3	38	47
1 : 10 ratio	15	19	24	34	42
Cylinder Diameter - mm	635	740	740	820	890
Cylinder Depth - mm	465	450	550	645	680
Wash speed - rpm	32	32	32	32	32
Extract speed - rpm	1100	1100	1100	800	800
G - force	430	500	500	300	320
Voltage	220/50/1	220/50/1	220/50/1	220/50/1	220/50/1
Motor power (kw)	2.2	3.0	3.7	5.5	5.5
Heating Option					
Electric - kw	3 X 4	3 X 6	3 X 7	3 X 8	3 X 9
Water inlet size - inch	3/4	3/4	3/4	1	1
Drain size - inch	3	3	3	3	3
Water consumption - l	152	164	200	253	282
Unit dimension [L x W x H] mm	839 X 1085 X 1365	939 X 1191 X 1492	939 X 1291 X 1492	1029 X 1370 X 1600	1099 X 1464 X 1719
Packing dimension [L x W x H] mm	959 X 1205 X 1515	1059 X 1311 X 1642	1059 X 1411 X 1642	1129 X 1470 X 1700	1199 X 1564 X 1819
Net weight - kg	440	582	663	790	880
Gross weight - kg	507	647	728	810	900

Other features



Wet clean
professional
programmable



Built in 5 channel chemical
signal for external peristaltic
pump [pump not included]